

DHI-KTP04 Pro

IP Villa Outdoor Station & Indoor Monitor



Technical Specification

DHI-VTO3311Q-WP

System

Main Processor	Embedded processor
Operating System	Embedded Linux Operation System
Button Type	Mechanical
Interoperability	ONVIF; CGI
Network Protocol	RTSP; DNS; P2P; UPnP; RTP; RTMP; SIP; SSH; HTTP/HTTPS; ONVIF

Basic

Camera	1/2.9" 2MP CMOS Low Illumination HD Colorful Camera
Field of View	H: 125°; V: 65°; D: 139°
WDR	120 dB
Noise Reduction	3D NR; 2D NR
Video Compression	H.264; H.265
Video Resolution	Main stream: 720p, WVGA, D1, and CIF; Sub stream: 1080p, WVGA, D1, QVGA, and CIF
Video Frame Rate	25 fps
Video Bit Rate	768 kbps–8 Mbps
Light Compensation	Auto IR
Day/Night	Auto (ICR)/Color/B/W; Color/B/W
Audio Compression	G.711a; G.711u; PCM

IP Villa Door Station

- Full metal casing design.
- Customizable Number of Buttons.
- Wi-Fi connection.
- 1/2.8" 2-MP HD CMOS camera.
- Offers two-way video call with indoor monitors.
- IR illumination and auto WDR.
- Supports two locks.
- Voice call and unlocking through app.
- IK08 and IP65 rated.
- H.264 and H.265.
- Unlock with IC card.
- PoE power supply.
- Included rain cover.
- Optional red-brown or dark blue front cover.

IP Indoor Monitor

- Elegant alluminum alloy design.
- Built-in Linux OS.
- 7" capacitive touch screen, 1024 × 600.
- Displays the camera's image when it receives a call from the door station.
- 6-channel wired alarm zone.
- Sends messages to the management center.
- Wi-Fi connection.
- Standard PoE.
- High-performance speaker and microphone that produces.
- High-quality voice calls.
- H.265 and H.264 video decoding.
- Customizable Do Not Disturb mode.

Switch

- 4 PoE ports with 10/100 Mbps Base-TX.
- 2 uplink ports with 10/100Mbps Base-TX.
- Supports 250 m long distance PoE transmission.



Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	2-way voice communication
Audio Enhancement	Echo suppression/digital noise reduction; Echo suppression; Digital noise reduction
Audio Bit Rate	16 kHz, 16 Bit

DHI-KTP04 Pro

Port

RS485	1
Alarm Output	1
Power Output	1-ch 12 VDC 100mA
Exit Button	1
Door Status Detection	1
Lock Control	1
Network Port	One RJ45 10M/100M network port

Function

Communication Mode	Full digital
Unlock Mode	Card; app; indoor monitor
Card Type	IC card
Auto Snapshot	Yes (SD card is inserted in the indoor monitor or door station)
Leave Videos	Yes (SD card inserted in VTH/VTO is needed)
Web Configuration	Yes
Wi-Fi	Yes
Wireless Standard	IEEE 802.11b; IEEE 802.11g; IEEE 802.11n
Wireless Frequency Range	2.4 GHz
Storage	Micro SD card (max. 256 GB)
Card Reading Distance	0 cm–3.5 cm (0"–1.38")

General

Appearance color	Grey
Power Supply	12 VDC, 1 A; Standard PoE
Power Adapter	Optional
Installation	Surface mount
Certifications	CE; FCC
Product Dimensions	188.1 mm × 107.2 mm × 30 mm (7.41" × 4.22" × 1.18")
Protection	IP65; IK08
Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	10%–90% (RH, non-condensing)
Operating Altitude	0 m–3,000 m
Power Consumption	≤ 3 W (standby), ≤ 6 W (working)
Net Weight	0.81 kg (1.79 lb)
Gross Weight	0.55 kg (1.21 lb)

DHI-VTH8621KMS-WP

System

Main Processor	Embedded processor
----------------	--------------------

Operating System	Embedded Linux operating system
Interoperability	ONVIF; SDK
Network Protocol	RTSP; RTP; SIP; DNS; SSH

Basic

Screen Type	Capacitive Touchscreen
Display Screen	7-inch TFT
Resolution	1024 × 600
Audio Compression	G.711a; G.711u; PCM
Audio Input	1
Audio Output	Built-in speaker
Audio Mode	2-way voice communication
Audio Enhancement	Echo suppression
Audio Bit Rate	16 kHz, 16 Bit
Communication Mode	IP KIT
Information Release	Receive and view text information released by the management center
Leave Videos	Yes (SD card inserted in VTH is needed)
Storage	Micro SD card (up to 64 GB)
DND Mode	Do not disturb period can be set; Do not disturb mode
Number of Extensions	Villa: 9 Apartment: 4 Wi-Fi intercom: 1 main monitor, 2 extension monitors
Wi-Fi	Yes
Wireless Standard	IEEE802.11b/802.11g/802.11n
Wireless Frequency Range	2.4 GHz
Wireless Security Encryption	WPA/WPA2; WPA-PSK/WPA2-PSK

Port

RS-485	1
Alarm Input	6
Alarm Output	1
Door Bell	Yes (use any alarm input port)
Network Port	One 10 Mbps/100 Mbps Ethernet port

General

Casing	Metal
Appearance color	Silver
Power Supply	12 VDC 1A Standard PoE (36–57 V, 0.35 A)
Installation	Surface mount
Certifications	CE; FCC
Product Dimensions	185 mm × 147 mm × 22.4 mm (7.28" × 5.79" × 0.88")
Operating Temperature	–10°C to +55°C (14°F to 131°F)

DHI-KTP04 Pro

Operating Humidity	10%–95% (RH, non-condensing)
Operating Altitude	0 m–3,000 m
Power Consumption	≤1.5W (standby), ≤7W (working)
Net Weight	0.39 kg (0.86 lb)
Gross Weight	0.58 kg (1.28 lb)


DH-PFS3006-4ET-36

General

Network Port	Port1-4: 4 × RJ-45 10/100 M (PoE) Port 5: 1 × RJ-45 10/100 M (uplink)
Appearance color	Black
Power Supply	100–240 VAC
PoE Budget	Port1-4 ≤30 W, whole PoE budget ≤36 W
Certifications	CE; FCC; UL
Product Dimensions	194.0 mm × 108.1 mm × 35.0 mm (7.64" × 4.26" × 1.38")
Operating Temperature	–10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–95% (RH) (non-condensing)
Operating Altitude	0–3,000 m (0–9,842.52 ft)
Net Weight	0.56 kg (1.23 lb)

Relevant Products

DHI-KTP04 Pro



DHI-VTH8621KMS-WP




DH-PFS3006-4ET-36



DHI-VTO3311Q-WP

Dimensions (mm[inch])

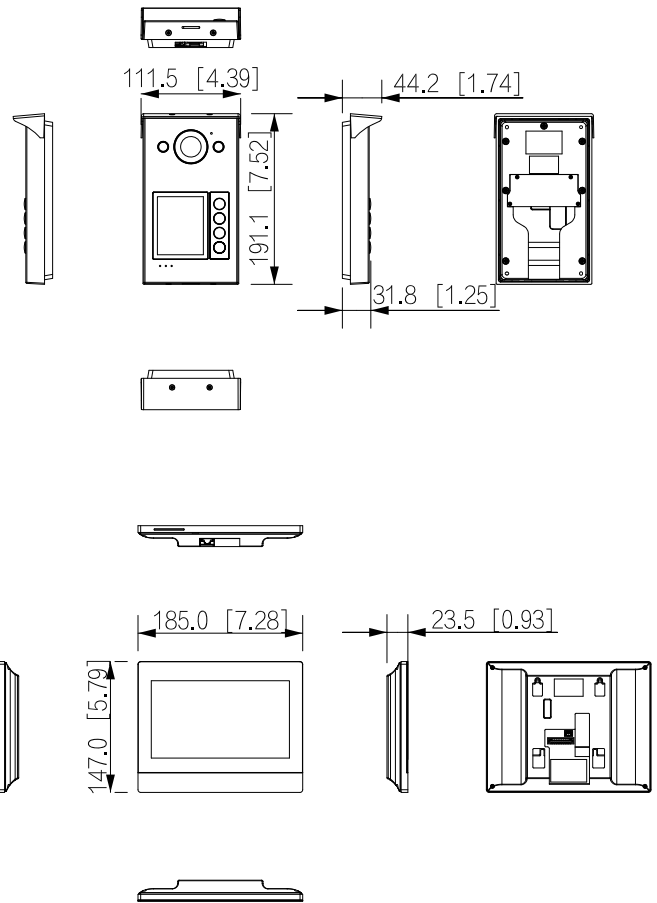

Application

